

## Features

- Conventional stand up working position
- Large composite base to increase stability
- Exclusive contact safety device activated when tool is positioned over flooring
- Ergonomic comfort grip handle
- Quick loading magazine with spring loaded nail pusher
- 2.8 lbs ( 1.3 kg ) non marring mallet included

## Applications

3/8" to 5/8" ( 10 to 16 mm )  
solid/engineered  
hardwood flooring

## Specifications

Weight: 8.75 lbs ( 3.96 kg )  
Height: 17 3/4" ( 451 mm )  
Length: 14 1/2" ( 368 mm )  
Width: 5 1/4" ( 133 mm )  
Capacity: 110 nails  
Operating pressure: 85 - 100 psi  
Lubrication : few drops daily,  
non detergent oil only

## FASTENERS

L cleats, 18 gage  
1 1/4" x 1 1/2" ( 32 mm, 38 mm )



**Primatch**<sup>®</sup>


LABORATOIRE PRIMATECH INC.  
1135, rue Jérémie-Fortin  
Québec, Qc,  
Canada G1J 1R8

Tel.: 1 (418) 522-7744  
USA / CAN: 1 (800) 363-1962  
Fax: 1 (418) 522-7466  
sales@primatch.ca  
www.primatch.ca

Printed in Canada 03-07

**Primatch**<sup>®</sup>

*Absolutely  
Genius*

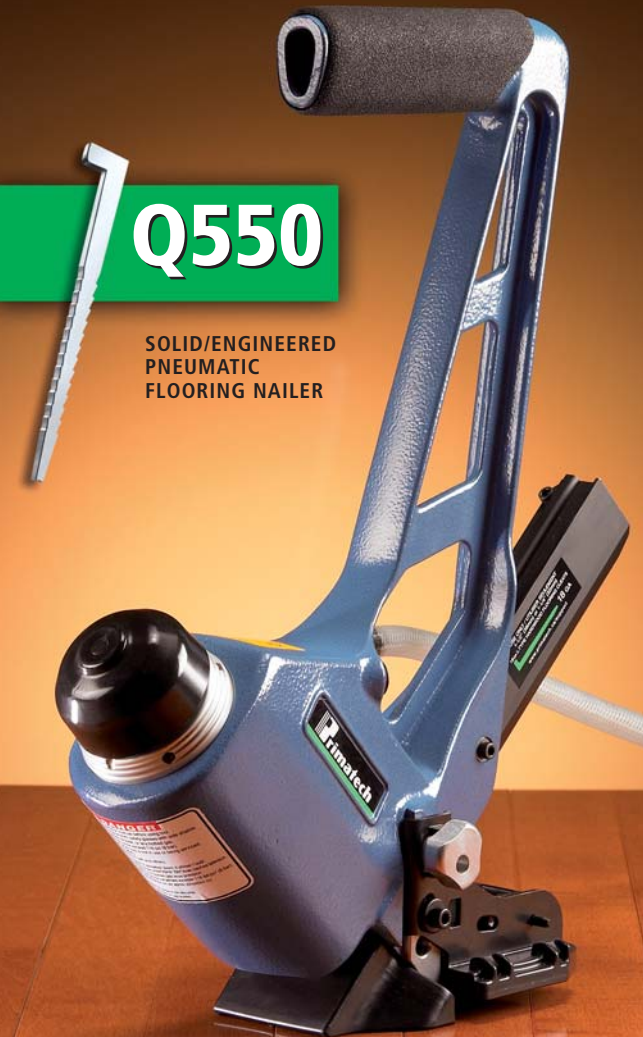

**Q550**

SOLID/ENGINEERED  
PNEUMATIC  
FLOORING NAILER


# Q550

SOLID/ENGINEERED PNEUMATIC FLOORING NAILER

**Primatech**<sup>®</sup>

Primatech Q550 Series offers the most advanced technology ( patent pending ) yet delivered by a pneumatic floor fastening tool.

Specifically designed for the installation of 3/8" to 5/8" ( 10 to 16 mm ) flooring, jobsite efficiency is assured with features such as a user friendly adjustable base plate, stand up working position, compact design and high speed discharge valve.

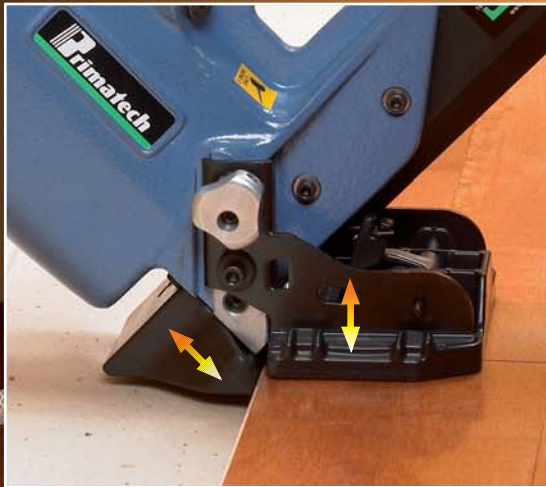

## INNOVATIVE ADJUSTABLE BASE PLATE

The Q550 features a dual action cam and screw adjustable base plate. It allows for infinite adjustment resulting in a perfect positioning of the fastener into the nail pocket of the board. At first, it sets against the front of the tongue which reduces the risk of damaging the top edge. Secondly, it features a cam operated height adjuster which eliminates the use of shims.

## INNOVATIVE AIR VALVE

Primatech's exclusive G2 air valve is setting new standards. Still extremely powerful and smooth, it features high speed discharge to minimize air consumption and compact design to install closer to the end wall. Also when it's time to service, the user friendly design makes for an easy task. **Primatech G2 air valve** assembly does not require special tooling to access or change internal components.

## Features

- "screw-on" cartridge assembly for quick access to internal components
- "snap-in" valve assembly for easy replacement
- powerful valve, will set nails independently of the striking force
- compact design to get closer to end walls

